


# SolarEdge Energy Bank 10kWh Battery

## For North America

# HOME BACKUP

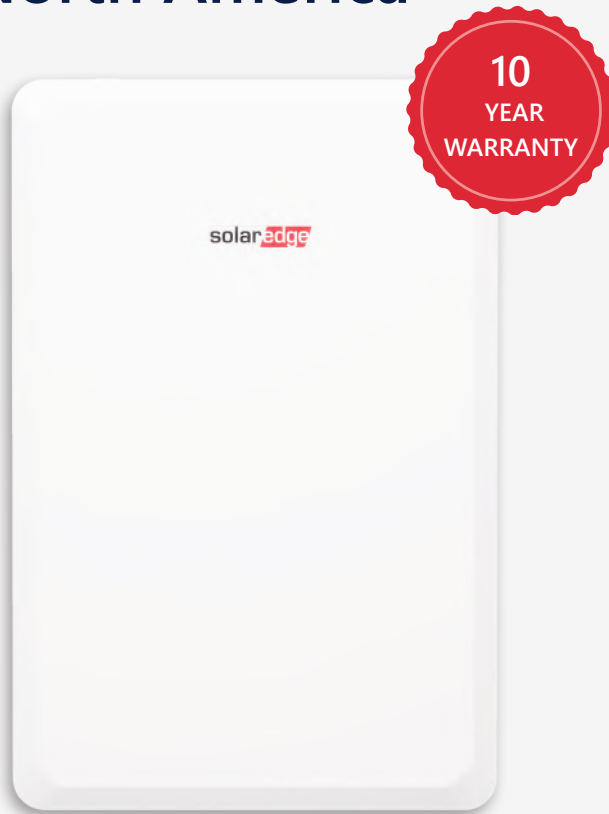

### Optimized for SolarEdge Energy Hub Inverters<sup>(1)</sup>

- Maximized system performance, gaining more energy to store and use for on-grid and backup power applications
- Integrates with the complete SolarEdge residential offering, providing a single point of contact for warranty, support, training, and simplified logistics & operations
- DC coupled battery featuring superior overall system efficiency, from PV to battery to grid
- Scalable solution for increased power and capacity with multiple SolarEdge inverters and batteries
- Solar, storage, EV charging, and smart devices all monitored and managed by a single app to optimize solar production, consumption and backup\* power
- Wireless communication to the inverter, reducing wiring, labor and installation faults
- Simple plug and play installation, with automatic SetApp-based configuration
- Includes multiple safety features for battery protection

\* Backup application are subject to local regulation and may require additional components and firmware upgrade

# / SolarEdge Energy Bank

## 10kWh Battery

### For North America

#### BAT-10K1P<sup>(2)</sup>

#### BATTERY SPECIFICATION

Usable Energy (100% depth of discharge)	9700	Wh
Continuous Output Power	5000	W
Peak Output Power (for 10 seconds)	7500	W
Peak Roundtrip Efficiency	>94.5	%
Warranty <sup>(3)</sup>	10	Years
Voltage Range	350-450	Vdc
Communication Interfaces	Wireless*	
Batteries per Inverter	Up to 3 <sup>(4)</sup>	

#### STANDARD COMPLIANCE

Safety	UL1642, UL1973, UL9540, UN38.3	
Emissions	FCC Part 15 Class B	

#### MECHANICAL SPECIFICATIONS

Dimensions (W x H x D)	31.1 x 46.4 x 9.84 / 790 x 1179 x 250	in / mm
Weight	267 / 121	lb / kg
Mounting <sup>(5)</sup>	Floor or wall mount <sup>(6)</sup>	
Operating Temperature <sup>(7)</sup>	+14 to +122 / -10 to +50	°F / °C
Storage Temperature (more than 3 months)	+14 to +86 / -10 to +30	°F / °C
Storage Temperature (less than 3 months)	-22 to +140 / -30 to +60	°F / °C
Altitude	6562 / 2000	ft / m
Enclosure Protection	IP55 / NEMA 3R - indoor and outdoor (water and dust protection)	
Cooling	Natural convection	
Noise (at 1m distance)	<25	dBa

\* The SolarEdge Energy Bank is designed for use with SolarEdge Energy Net for wireless communication. The inverter might require a matching SolarEdge Energy Net Plug-in (more details below).  
Using RS485 could reduce the usable energy to 9500Wh.

(1) Please refer to the SolarEdge Energy Bank battery connections and configuration application note for compatible inverters.

(2) These specifications apply to part number BAT-10K1PS0B-01.

(3) For warranty details please refer to the SolarEdge Energy Bank battery Limited Warranty.

(4) Installations with multiple SolarEdge Energy Bank batteries connected to a single inverter require a pair of branch connectors (DC + and DC -) per battery excluding the last battery. Support for 3 batteries is pending supporting inverter firmware. The branch connectors should be purchased separately.

(5) Installation and mounting requires handles that should be purchased separately. Please refer to the Accessories' PN table below.

(6) The floor stand is purchased separately. One floor stand is required per SolarEdge Energy Bank battery. Please refer to the Accessories' PN table below.

(7) Please note that operating the SolarEdge Energy Bank at extreme temperatures for extended durations of time may void the Energy Bank's warranty coverage.  
Please see the Energy Bank Limited Product Warranty for additional details.

#### SolarEdge Energy Bank Battery – Accessories (purchased separately)

Accessory	PN
Floor stand	IAC-RBAT-FLRSTD-01
Branch connectors set (includes a pair of DC + and DC - connectors) Required for installations with multiple SolarEdge Energy Bank batteries with a single inverter	IAC-RBAT-USYCBL-01
Handles	IAC-RBAT-HANDLE-01
SolarEdge Energy Net Plug-in	ENET-HBNP-01
Battery inverter extension cable 2m long (MC4 to terminal block)	IAC-RBAT-10M420-01