



DATA SHEET

# abora âH72 SK






Hybrid solar panel with simultaneous thermal and photovoltaic production.




\* All percentages of production are conditioned to the working temperature range of installation.

### Dimensions

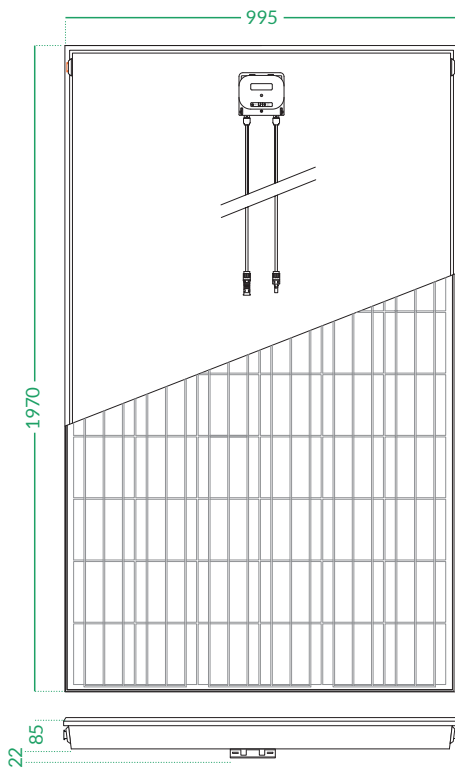

### Loss of charge

Pressure drop:  $T^a$  max: 20,13 °C /  $T^a$  min: 19,39 °C

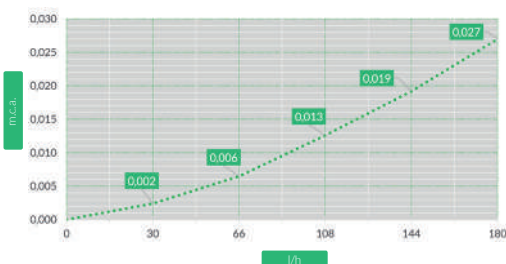

### General specifications

Length x width x thickness	1.970 x 995 x (85+22) mm
Total area	1,96m <sup>2</sup>
Opening area	1,88 m <sup>2</sup>
Number of cells	72
Weight	50 kg.
Front glass	3,2 mm. tempered
Framework	Aluminum
Connection box protection	IP65
Number of diodes	3 diodes
Dimensions of the cell	156 x 156
Connection type PV / length cables	Solarlok PV4 / 1m


### Electric specifications

Standard test conditions STC: AM 1.5. irradiation 1000 w / m<sup>2</sup>  
Cell temperature 25 ° C

Cell type	Mono-crystalline
Rated power (W)	350 W
Maximum power voltage (Vmpp)	39,18 V
Maximum power current (Impp)	8,98 A
Open circuit voltage (Voc)	48,82 V
Short circuit current (Isc)	9,73 A
Module efficiency (%)	17,8
Power tolerance (W)	0/+3%
Maximum system voltage	DC 1000 V (IEC)
Backsheet	Black
Temperature coefficient of Pmpp	-0,41%/°C
Temperature coefficient of Voc	-0,33%/°C
Temperature coefficient of Isc	+0,06%/°C
Maximum reverse current	15A
NOCT Temperature*	45+/-2 °C

### Thermal specifications

Optical performance	0,7
Coefficient of thermal losses, a1	5,98 W/m <sup>2</sup> .K
Coefficient of thermal losses, a2	0,00 W/m <sup>2</sup> .K <sup>2</sup>
Internal liquid capacitance	1,78 L
Stagnation temperature	126°C
Number of hydraulic connections	4 connections
Measure Hydraulic connection	quick connect
Maximum permissible pressure	10 bar
Nominal flow	60 L/h

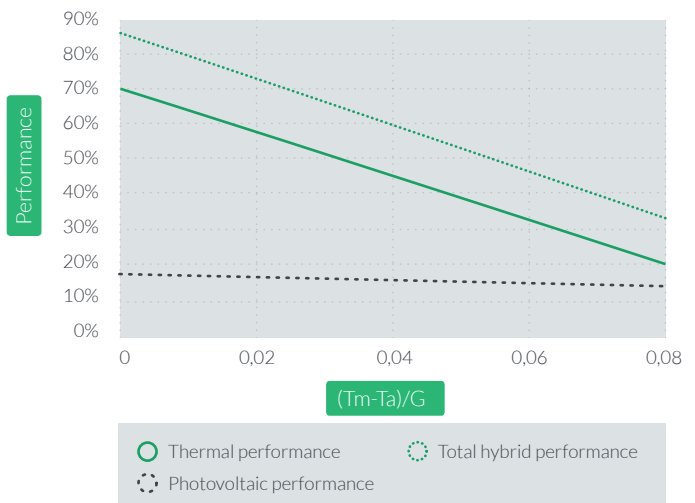

Conforming with Product Standards:  
IEC 61215 Ed2; IEC 61730-1,-2:2004;  
EN 12975-1:2006 + A1:2001 ; EN ISO 9806:2017

Subject to technical modifications without notice.  
Guarantee of 10 years.

MORE INFO AT  
[www.abora-solar.com](http://www.abora-solar.com)